


# TIGER LAKRA LOG CABIN

---

## GENERAL ASSEMBLY INSTRUCTIONS

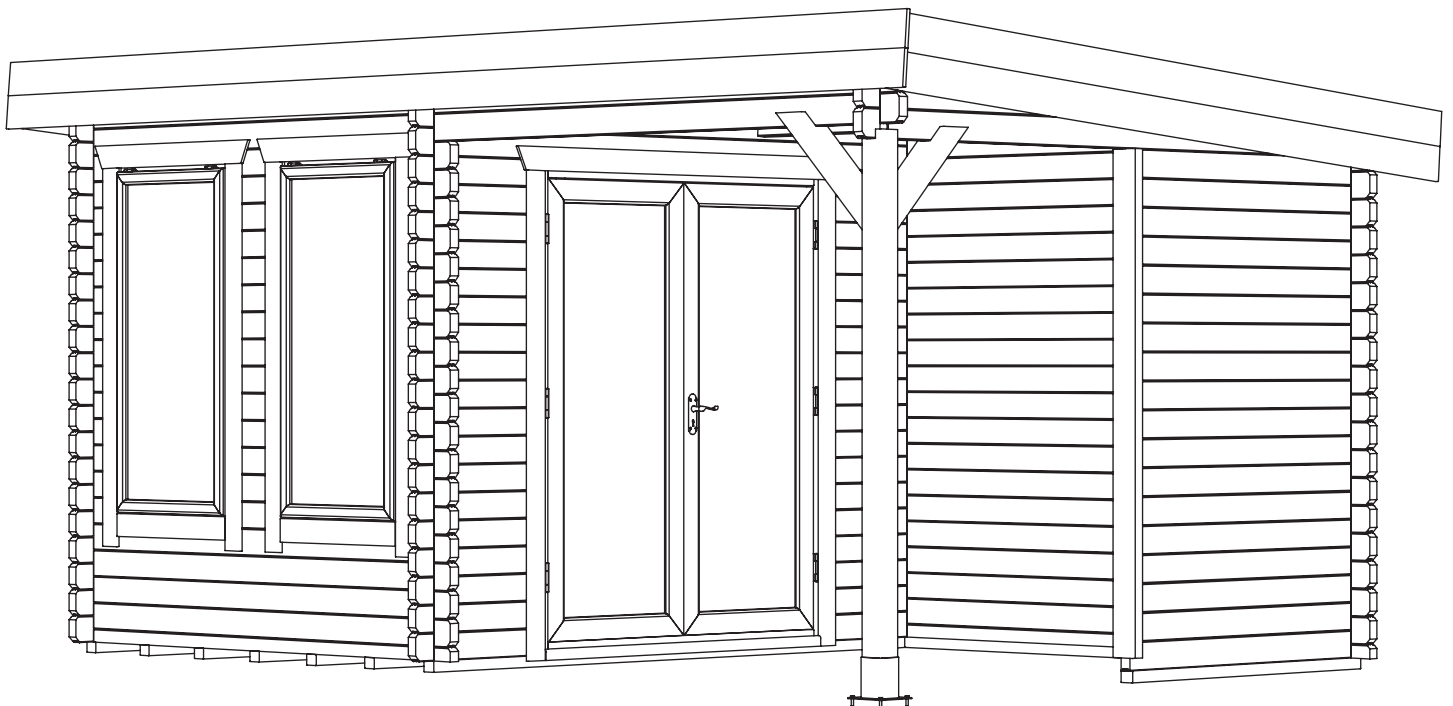


# BEFORE YOU GET STARTED

## PLEASE READ INSTRUCTIONS CAREFULLY

- Check the pack and make sure you have all the parts listed.
- When you are ready to start, make sure you have the right tools at hand (not supplied).
- Ensure there is plenty of space and a clean dry area for assembly.

### TIMBER

As with all natural materials, timber can be affected during various weather conditions. For the duration of heavy or extended periods of rain, swelling of the wood logs may occur. Warping of the wood may also occur during excessive dry spells due to an interior moisture loss. Unfortunately, these processes cannot be avoided but can be mitigated. It is suggested that the outdoor building is sprayed with water during extended periods of warm sunshine and sheltered as much as possible during rain or snow.



SUMMER  
CONTRACTION



WINTER  
EXPANSION



WOOD WARPING  
MAY OCCUR

Please do not paint or treat your cabin timbers before assembly as they must stay dry for a snug tongue and groove fit. To validate your guarantee and ensure longevity of the product, it is **ESSENTIAL** that your building is treated with an appropriate high-quality oil or solvent based preservative **AFTER** assembly, both internally and externally, then annually thereafter.

### BUILDING A BASE

Care must be taken to ensure the product is placed on a suitable base. When thinking about where the building and base is going to be constructed, ensure that there will be access to all sides for maintenance work and annual treatment.

Ensure the base is firm and level and is built on firm ground, to prevent distortion.

The constructed base must be at least the size of tanalised floor bearers as referenced in supplied construct diagram. It is also recommended that the floor be at least 25mm above the surrounding ground level to avoid flooding.

### TYPES OF BASE

- Durable plastic grid\*.
- Concrete 75mm laid on top of 75mm hard-core.
- Slabs laid on 50mm of sharp sand.
- Timber base - Self constructed/Buy pre-made.



PLASTIC BASE



CONCRETE BASE



SLAB BASE



TIMBER BASE



BROKEN SLABS



BARE SOIL



LOOSE GRAVEL

*\*We recommend a Fastfit EcoBase for your building. It is durable, lightweight, flexible, and easy to put in place. Please see [tigersheds.com](https://tigersheds.com) for details.*

### CAUTION:

All buildings should be erected by two competent adults.



### CAUTION:

It is advisable to wear safety gloves during building installation.



*Whilst all products manufactured are made to the highest standards of safety, we cannot accept responsibility for your safety whilst erecting or using this product.*



The mark of  
responsible forestry

FSC® C125286



### MADE IN THE UK SINCE 1913.

We have been making our high quality, great value garden buildings here in Britain for decades.

## GO WITH THE PRO!:

We understand how busy life can be. Our Pro-Installation service can take the stress and strain out of assembling your quality Tiger building for you. We recommend using professional and dedicated installers to erect your building. With their knowledge and experience, they will ensure that your cabin is put properly in place ready for you to enjoy your space for years to come.

If you have not booked our Pro-Installation service and would like to arrange an installation, please contact our friendly customer support team on **0113 205 4189** (Mon – Fri 9am-5pm) or email **[sales@tigersheds.com](mailto:sales@tigersheds.com)**.

- The pro-install team will contact you to arrange a suitable time and date for the fitting.
- Sit back, relax and let our professional home installation service do all the hard work for you!
- Please view our Pro Installation page on our website for full terms and conditions.

# BEFORE YOU GET STARTED

## TOOLS REQUIRED

We recommend using the following tools (not supplied):



HAMMER



RUBBER Mallet



DRILL



LADDER



TAPE MEASURE



SHARP KNIFE



SPIRIT LEVEL



SCREWDRIVER +



WOOD SAW



SPANNER

## FIXING KIT CONTENTS:



Clout Nails (20mm Galvanised - QTY 300)



Nails (40mm Galvanised - QTY 30)



Nails (65mm Galvanised - QTY 300)



Nails (40mm Bright Annular - QTY 400)



M6 Coach Bolts (40mm - QTY 8)



Screws (40mm - QTY 30)



Screws (60mm - QTY 8)



Screws (80mm - QTY 16)

## Unpacking supplied cabin.

- Remove all wrapping from delivery. From top to bottom, cut banding holding all components together and remove the cabin components.

**NOTE: PARTS MAY HAVE BECOME LOOSE OR MOVED DURING TRANSPORTATION.**

- Lay components on a dry, horizontal surface.

## BUILDING PACK CONTENTS:

For full details of what should be included please see the Product Construct Diagram and itemised cutting list that is supplied with the delivery. They are also available on request in pdf form from our helpful Customer Support team – please call **0113 205 4189** or use the Items Delivered Query form at **[tigersheds.com/contact](https://tigersheds.com/contact)**.

## ASSEMBLY

- Assembly is straightforward if you follow these step-by-step instructions.
- We recommend getting everything aligned properly before screwing together and that screw holes should be pre-drilled to avoid splitting the timber. (Do not come pre-drilled).

## IMPORTANT




- Before assembly, please make sure you have a suitable base ready to erect your building on.
- Your base **MUST** be firm and level to ensure that the building is assembled properly and is square.
- Please carefully remove the packaging and unpack the components in your delivery.  
**NOTE: ADDITIONAL TIMBER MAY BE INCLUDED AS PACKING MATERIALS.**
- **DO NOT** start your build until you have checked that all the parts of your building are present and in a suitable condition.
- If you are organising a third party to install your building, it is best practice not to schedule this immediately on receipt of your order, to give you time to check your delivery.

# TIGER LAKRA LOG CABIN GENERAL INSTRUCTIONS

## Step 1:

### UNPACKING CABIN COMPONENTS:

- Unpack all components from your supplied cabin pack(s) and place each individual component in the correct order using the supplied construct diagram and parts list as a guide. Ensure all components are present and in the correct position before beginning assembly.
- Each log interlocks in a staggered pattern.  
**NOTE: SOME LOGS FEATURE ADDITIONAL FULL NOTCHES & HALF NOTCHES.**
- Before securing, ensure that the logs are fitted properly in their respective tongue and grooves, gently tapping down with a mallet. **(Detail A1 & A2)**

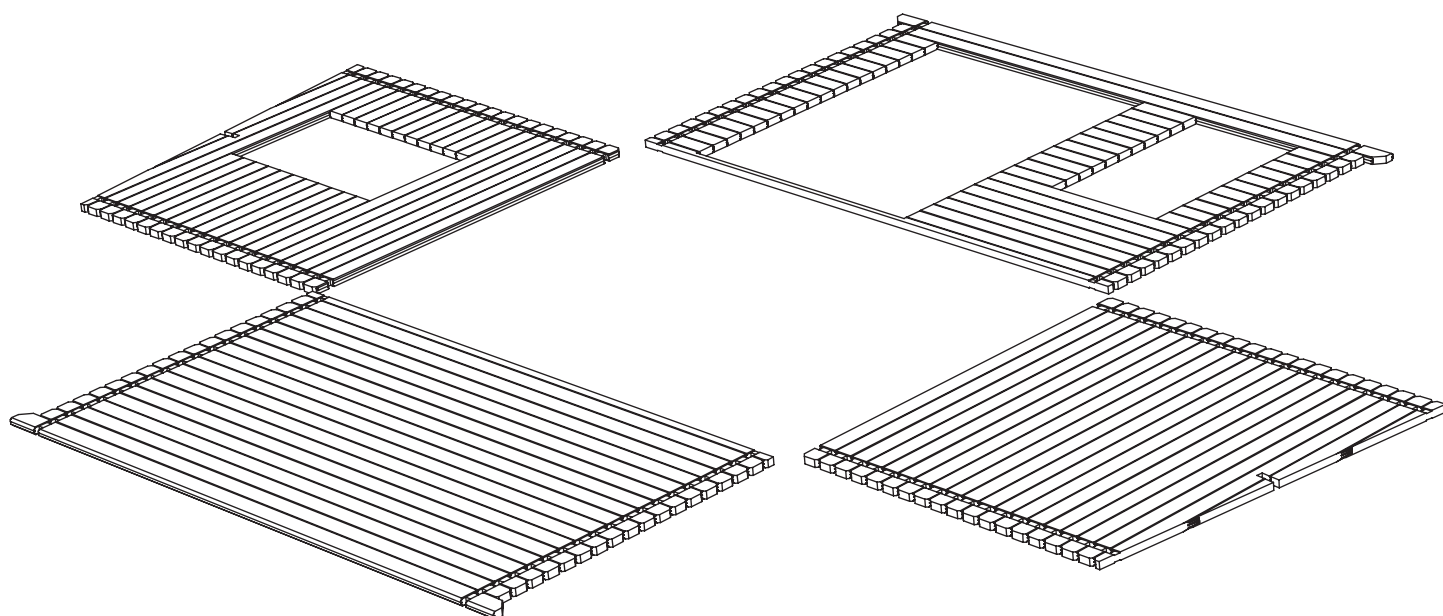

#### TOP TIP

Use packing materials to protect when tapping logs into place.

## Step 2:


### DOUBLE DOOR ASSEMBLY

- For cabins with double doors, build up door frame using the four door components provided. Remove supplied key. This is usually stapled over keyhole.
- Arrange the door framing onto a firm and level surface, with hinges to the ground. Slot the door sill (base) then the door head into place. Secure the 4 sections together through the joints using 1x S60 per corner.

(Detail B)

**NOTE: HOLES FOR FRAMING ARE PRE-DRILLED IN THE FACTORY.**

**NOTE: THIS IMAGE IS FOR ILLUSTRATIVE PURPOSES AND DOOR STYLE MAY DIFFER FROM YOUR SUPPLIED PRODUCT.**

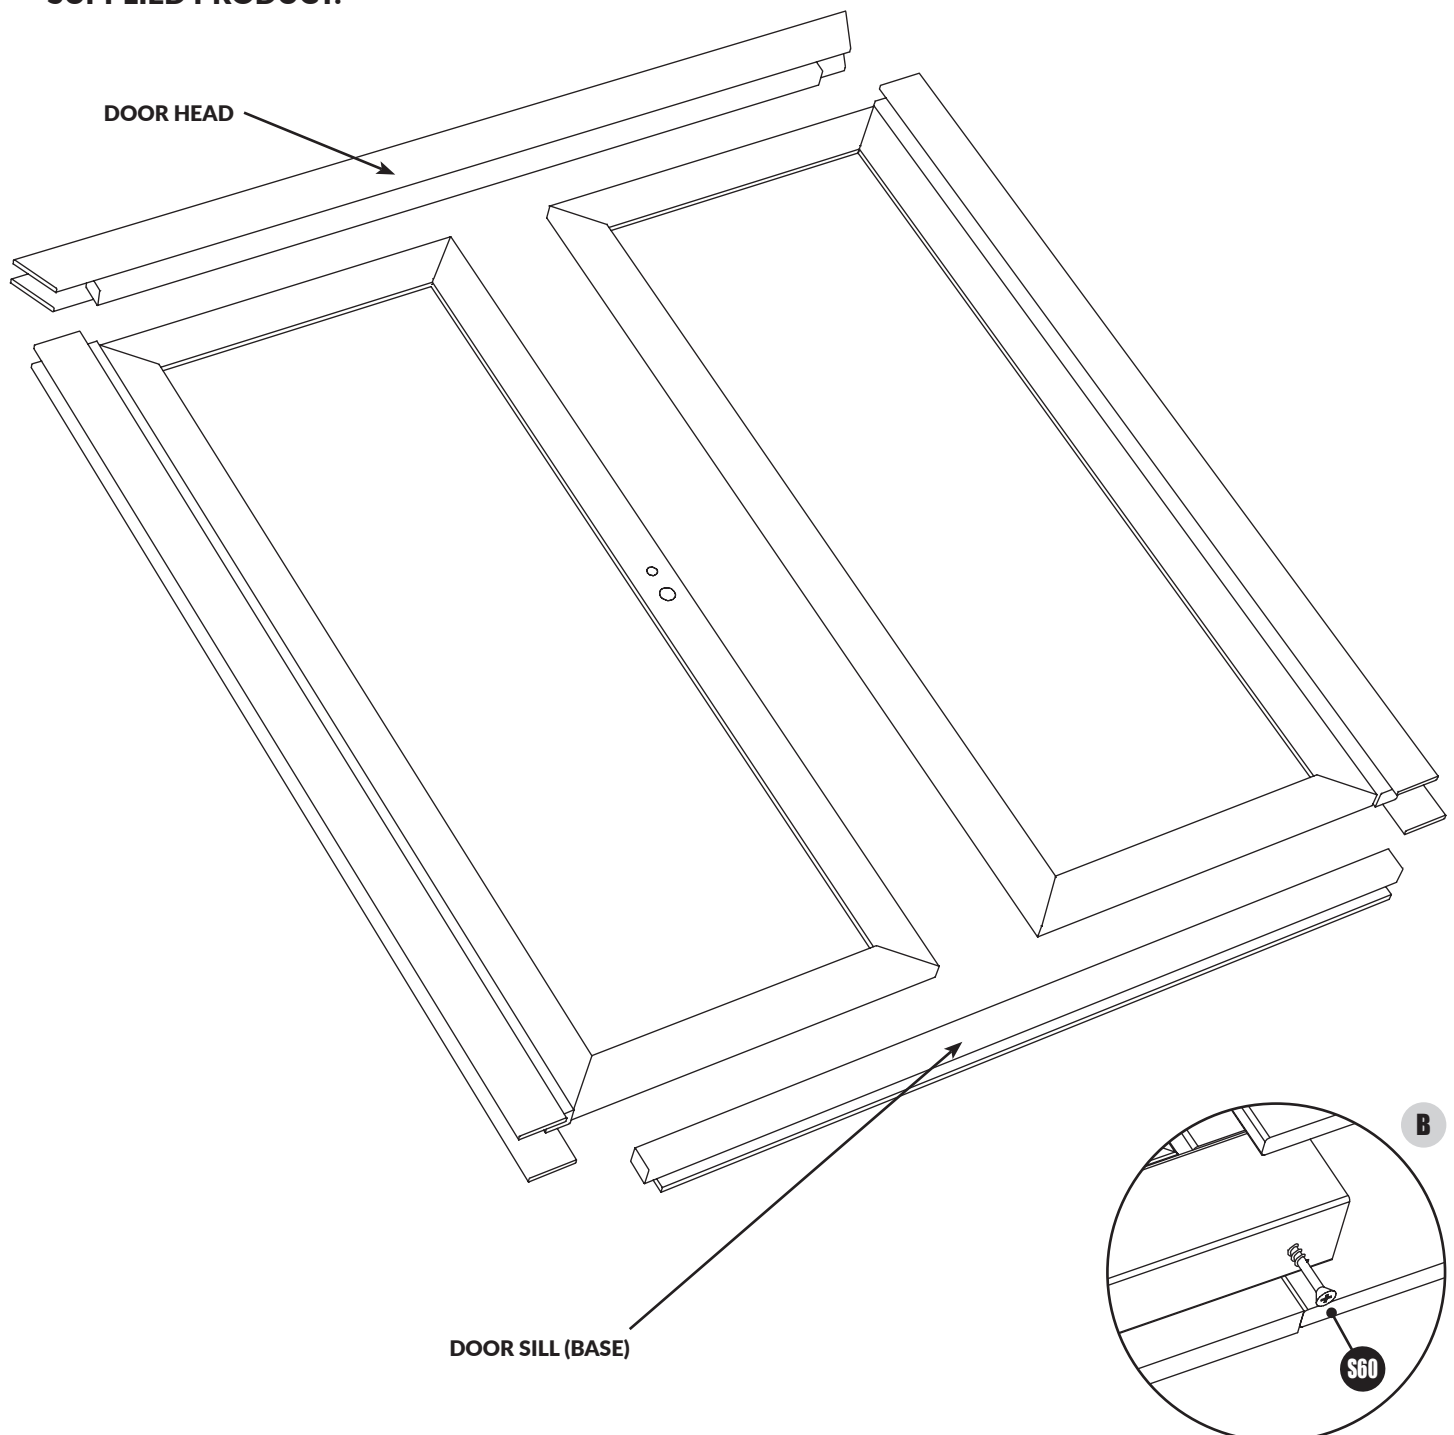



# TIGER LAKRA LOG CABIN GENERAL INSTRUCTIONS

## Step 3:

### LAY DOWN TANALISED BEARERS

- Refer to the floor plan of your construct diagram, position the tanalised bearers on prepared base.
- Spread out the tanalised bearers equally at approx. 400mm centres. *(Detail C For Orientation)*

**NOTE: ON LARGER CABINS, TANALISED BEARERS MAY BE SUPPLIED IN MORE THAN 1 PIECE. PLEASE REFER TO YOUR CONSTRUCT DIAGRAM FOR THIS.**




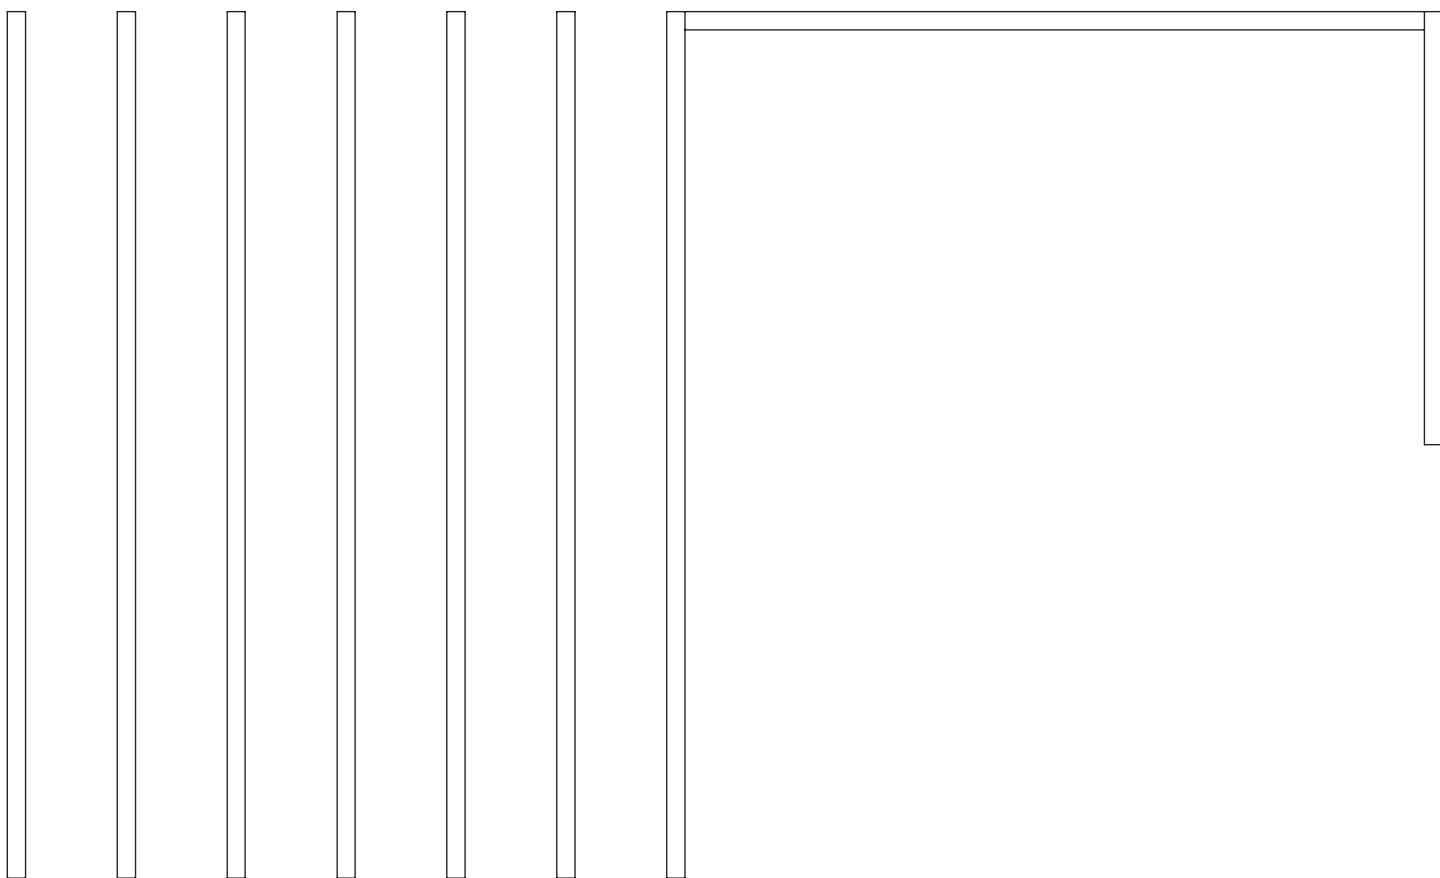




## Step 4:

### BEGIN BUILDING WALLS

- Place 1st layer of logs on the edges of the bearers. Ensure half logs are put down first.  
See construct diagram for build order.
- Measure corner to corner diagonally to make sure cabin floor is square. If both values are equal, your frame is square. Realign the floor until square. Do not trim.
- Screw logs into tanalised bearers using 3x S80 per log. (1x S80 in centre, 1x S80 per end notch)
- For fixing through notches. **(Detail D1)**
- For fixing through half log. **(Detail D2 & D3)**
- Check that floor is level using a spirit level.

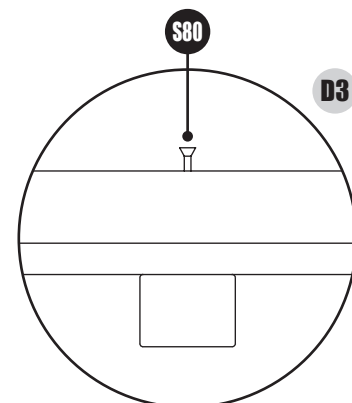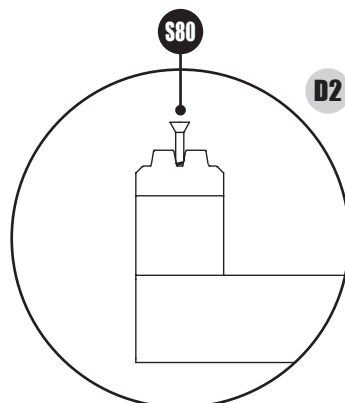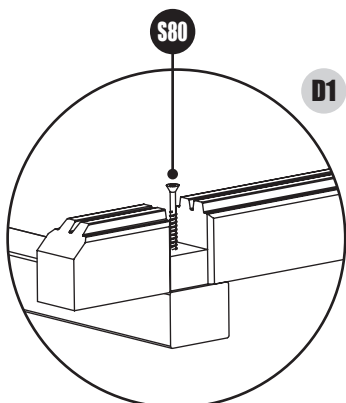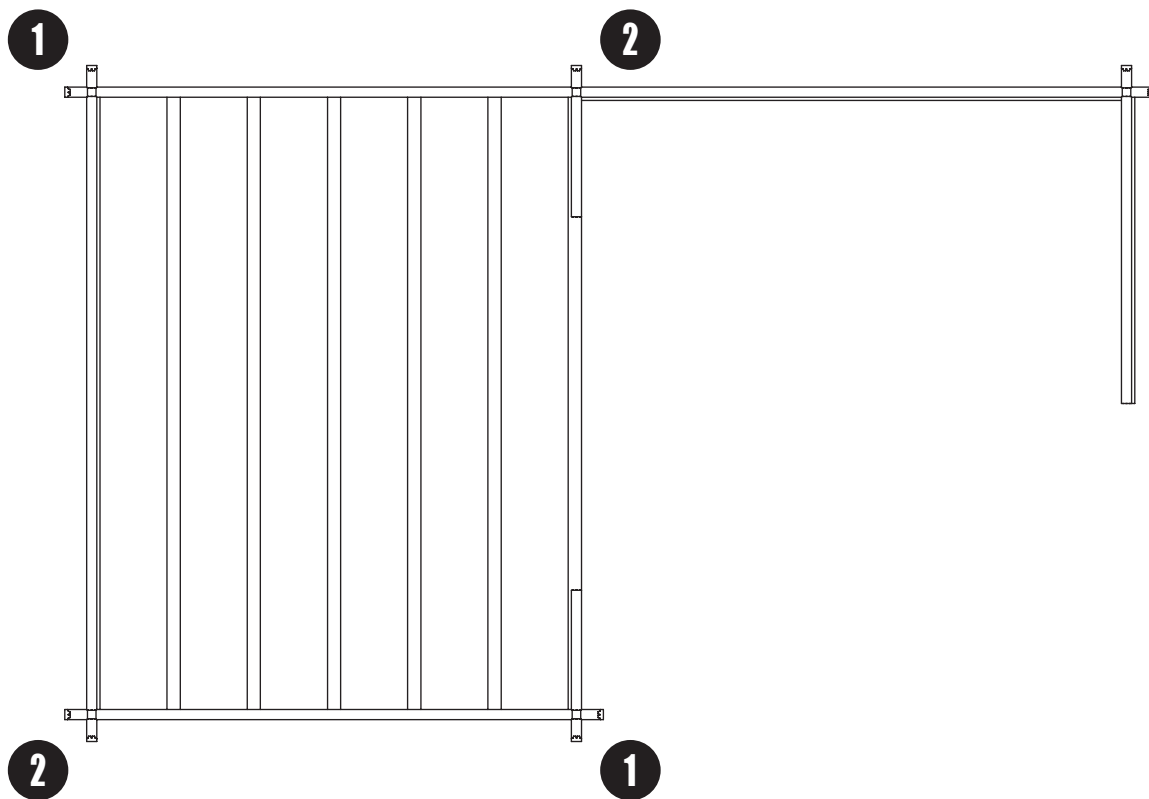

# TIGER LAKRA LOG CABIN GENERAL INSTRUCTIONS


## Step 5:

### SECURING FLOOR

- Check floorboards are correct size. Do not mix up with roof boards.
- Lay 5 floorboards in position and tack in place. Leave approx. 2.5mm gap between the edge of the floorboards and the inside of external walls. **(Detail E)**

**NOTE: DO NOT FULLY SECURE AS THESE ARE ONLY TO KEEP THE FLOOR SQUARE WHILE BUILDING THE LOG CABIN.\***


- \*For cabins with internal partition, the floorboards will need to be fully installed at this stage to allow partition base logs to be installed. Please jump to Step 14 for details.

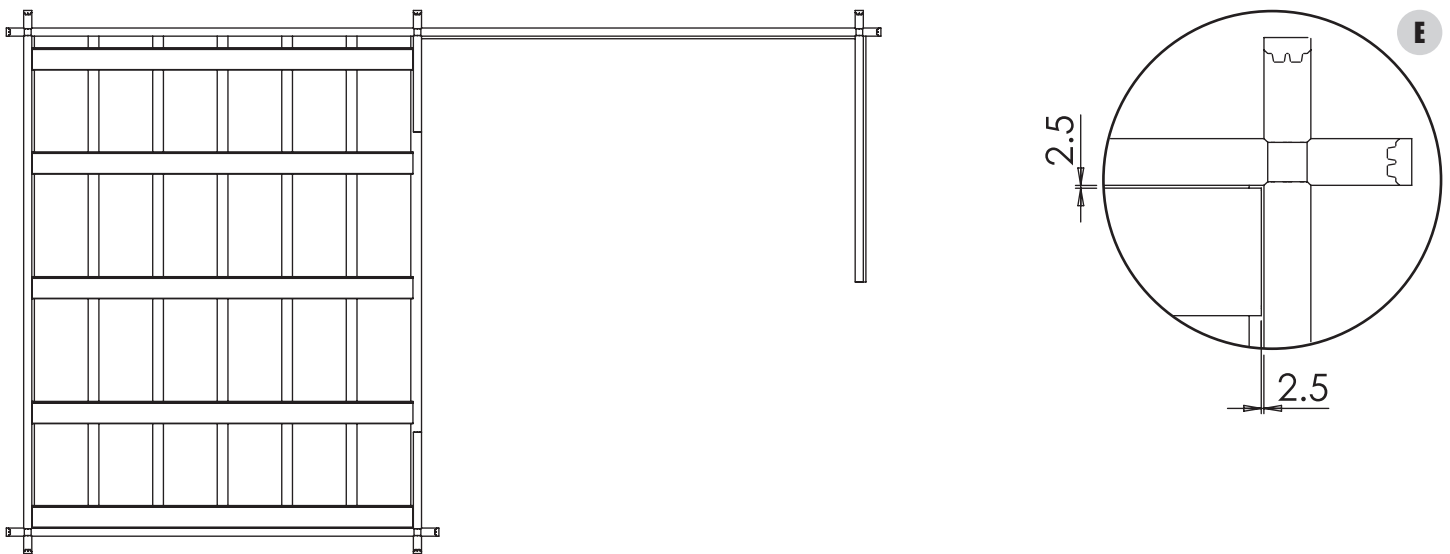

## Step 6:

### CONTINUE TO BUILD WALLS


- Using construct diagram as a guide, begin to build up the walls by interlocking the logs layer by layer until 3 logs high.
- At this point, store remaining floorboards inside the cabin ready for installation. You may not be able to fit floorboards through the door once cabin has been built.

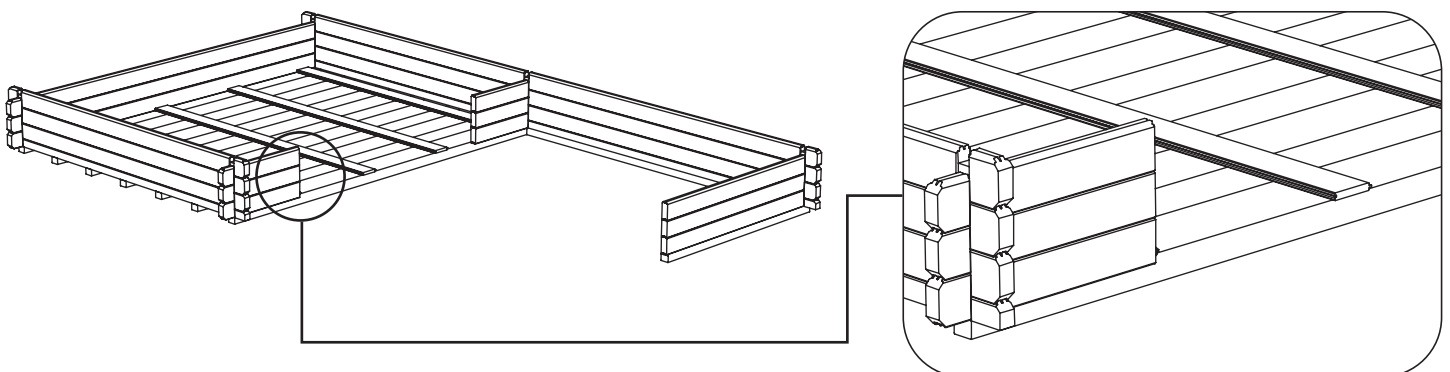


## Step 7:

### INSTALL DOORS & WINDOWS


- Take the assembled doors and frame and slide over the logs until fully inserted.
- Position centrally within opening. This will leave a gap either side for settling. **(Detail F1)**  
**NOTE: DOORS ARE VERY HEAVY, PLEASE TAKE CARE WHEN LIFTING INTO PLACE.**
- Fix supplied door handle to enable access to the cabin. **(Detail F2)**

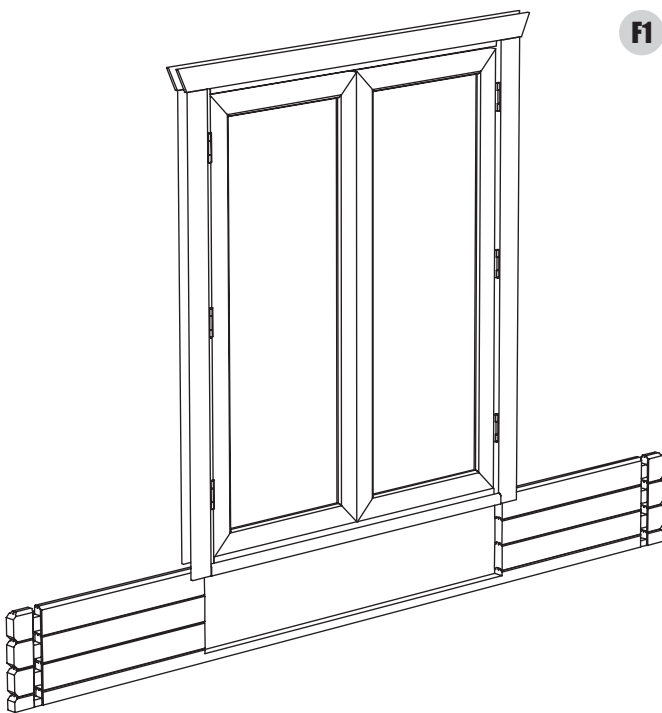

F1

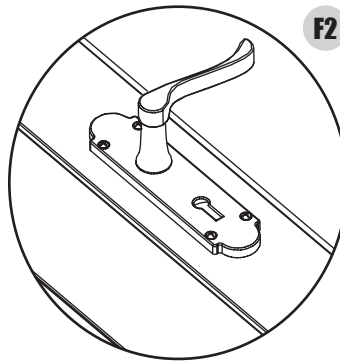

F2

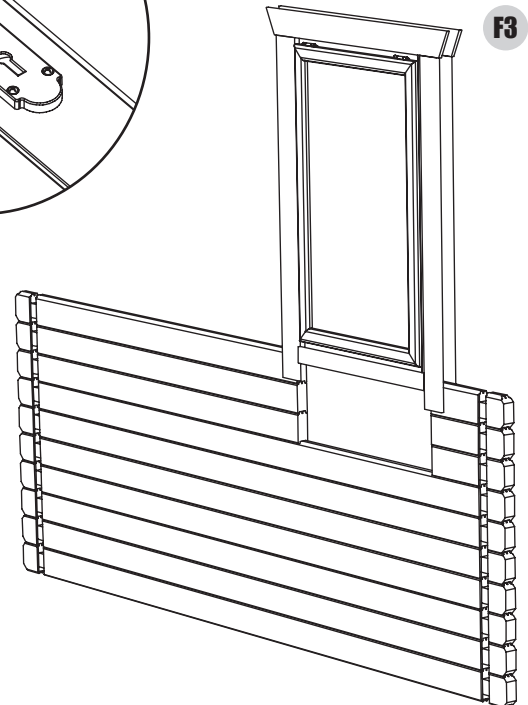

F3


- Continue adding more layers of logs until you reach 3 logs past window height, before slotting the windows into position. **(Detail F3)**

- Position centrally within opening. This will leave a gap either side for settling.  
**NOTE: WINDOWS CAN BE VERY HEAVY, PLEASE TAKE CARE WHEN LIFTING INTO PLACE.**

**NOTE: IF YOUR BASE IS NOT FIRM AND LEVEL THEN THIS CAN CAUSE THE DOORS AND WINDOWS TO TWIST OR TO GO OUT OF SQUARE. USE A SPIRIT LEVEL TO CHECK.**

**NOTE: DO NOT FIX THE DOORS OR WINDOWS IN PLACE AT THIS STAGE**

- Continue to build up your cabin to eaves height. **(Detail F4)**

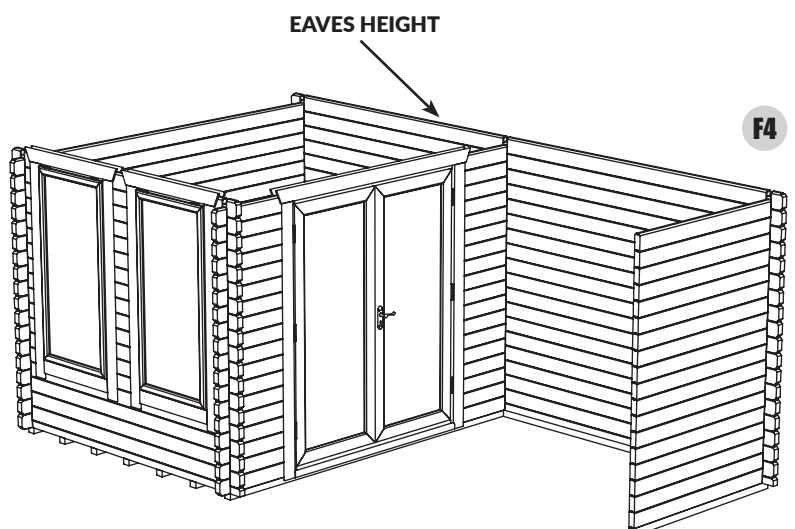

F4

# TIGER LAKRA LOG CABIN GENERAL INSTRUCTIONS

## Step 8:

### INSTALL GABLE TOPS








- Unscrew pent gable top as shown. Keep screws in a safe place.
- Install pent gable tops. Place **1** on top of the final side logs.
- Fit logs to high and low side of cabin as shown.
- Fit upright post under 1, using notch as guide.
- Attach support arms to upright post, using notches as a guide on logs, with 2x S80 into the post only. **(Detail G)**

**NOTE: DO NOT FIX POST AND SUPPORT ARMS TO LOGS AT THIS STAGE.**

**NOTE: LONGER SUPPORT ARM FITTED TO HIGH SIDE OF CABIN.**

- Repeat the process for **2 3 4** logs from pent gable top. Build up logs on high side to complete this wall.
- Secure pent gable top back together using previously removed screws.

**NOTE: LARGER CABINS MAY HAVE ADDITIONAL TRUSSES TO SUPPORT ROOF.**

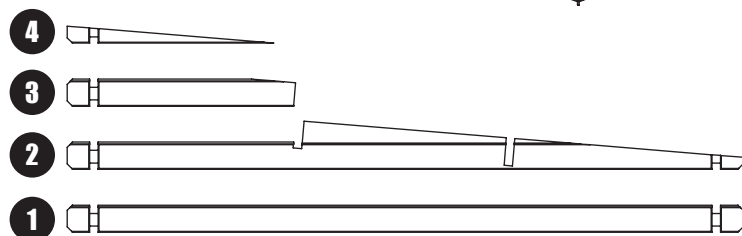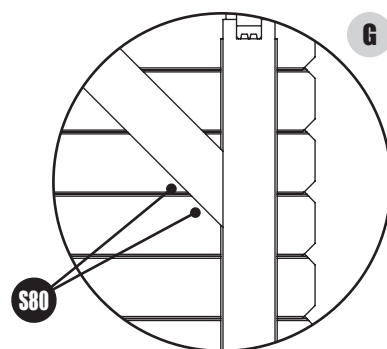
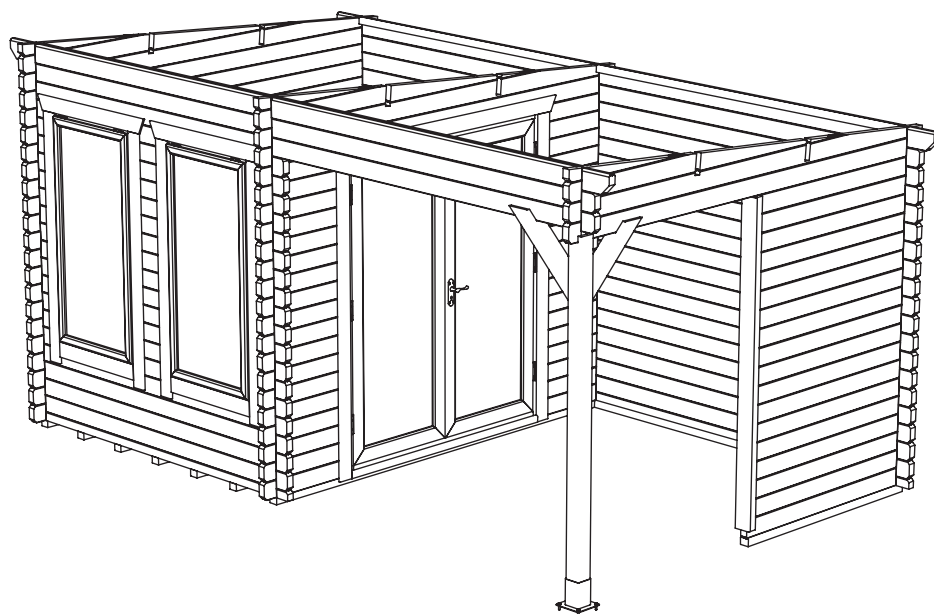


## Step 9:


### INSTALL PURLINS

- Position the purlins with the angled cuts to the bottom. **(Detail H1)**  
Ensure notches in purlins line up with gable tops.
- Secure the purlins into the gable tops using 2x N65 per purlin per gable top. **(Detail H2)**
- Repeat for all purlin and gable top joins.

H1

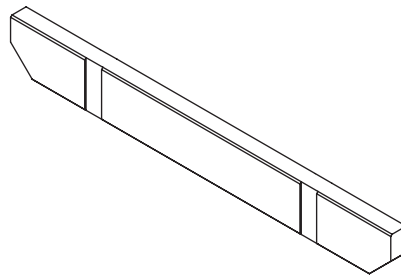

H2

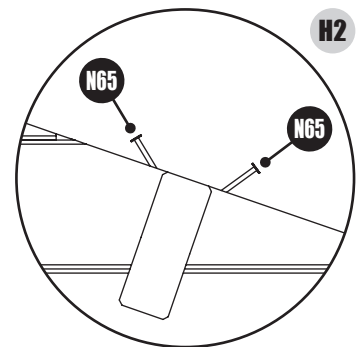




## Step 10:

### INSTALL ROOF BOARDS

#### TOP TIP

Measure 175mm from the bottom edge of roof board to outside of back wall to get correct overhang on lower edge of roof. **(Detail H3)**

- Before installing the roof boards, check that the cabin is square both vertically & horizontally.  
Adjust if required.
- Position a tongue & groove roof board flush with purlin at one end of roof.
  - Fix through high side top log using 2x N65 per board.. **(Detail I1)**
  - Fix through one purlin using 2x N65 per board. **(Detail I2)**
  - Fix through low side top logs using 2x N65 per board. **(Detail I3)**
- Continue working across roof, repeating the steps above.
- The final roof board may need trimming to sit flush with purlin at end.



**CRITICAL!: ALL ROOF BOARDS MUST HAVE 2X N65 PER FIXING POINT AS OUTLINED ABOVE.**


# TIGER LAKRA LOG CABIN GENERAL INSTRUCTIONS

## Step 11:

### INSTALL ROOF BATTEN AND SKIRTING

- Fix roof batten onto the underside of roof boards on low side using 6x N40, evenly spaced along length. Finish with a piece of skirting, attached using 6x N40, evenly spaced along length. **(Detail J1 & J2)**
- Fix roof batten only on high side as shown using 6x N40, evenly spaced along length. **(Detail J3)**



**NOTE: ROOF BATTENS AND SKIRTING MAY COME IN MORE THAN 1 SECTION.**

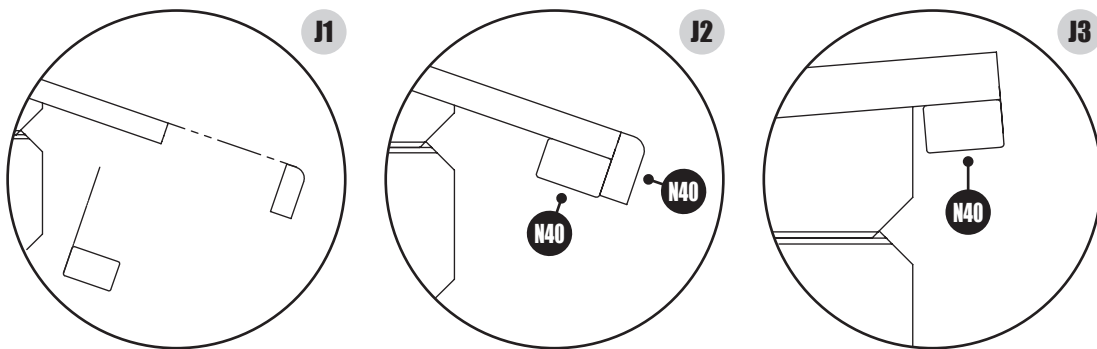

## Step 12:

### SECURE UPRIGHT POST AND SUPPORT ARMS TO CABIN





- Secure upright post to cabin logs using 2x S40 per side. **(Detail K)**
- Repeat for both support arms.

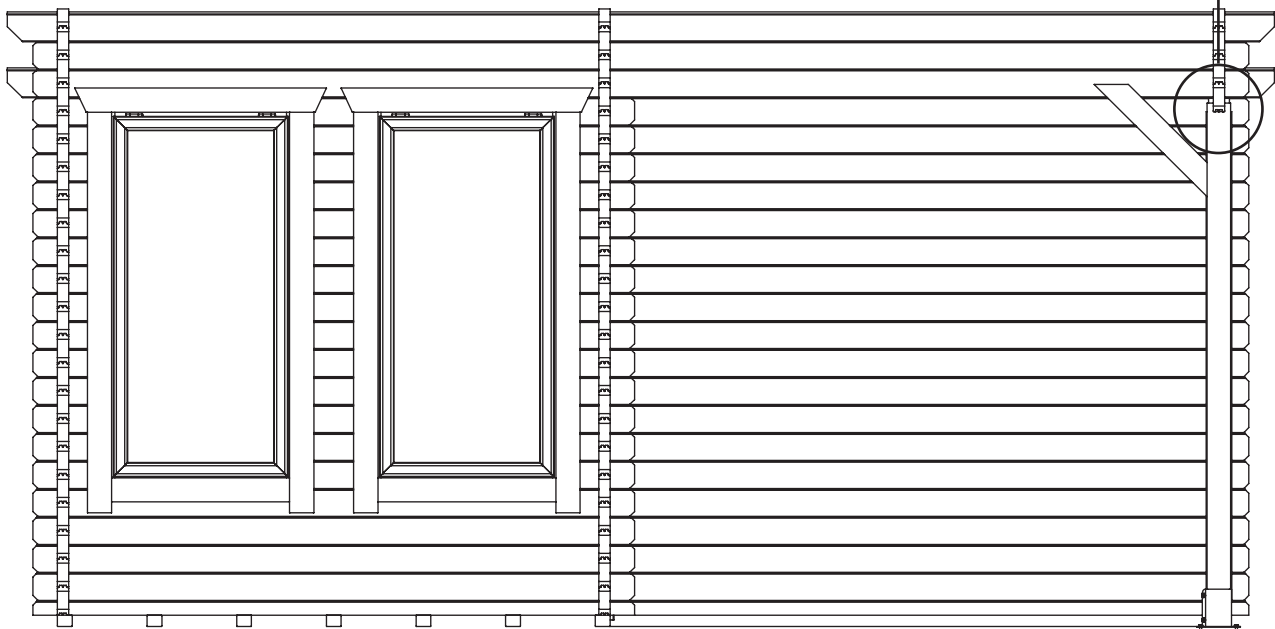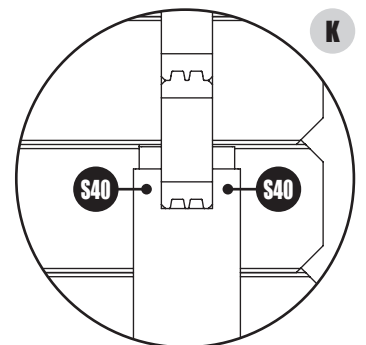

## Step 13:

### FELT THE ROOF - MEASURE AND CUT BEFORE INSTALLING FELT

- Roll felt out onto a clean flat surface 30 minutes before you need it so it has a chance to flatten out.
- Measure length of roof and allow 75mm overhang at each end. Cut each strip of felt to size. Use a straight edge to guide cutting.
- Roll cut felt piece along low side of roof, Section 1, leaving sufficient overhang to fold down onto roof edge. Do not fold underneath roof. **(Detail L1 & L2)**
- Once felt is rolled out, fix to roof using CN20 both ends, making sure felt is straight. Secure through skirting using CN20 at approx. 100mm intervals. **(Detail L2)**  
Ensure the felt is tight, secure the top side of felt using CN20 at approx. 100mm intervals. **(Detail L3)**
- Repeat for remaining felt, working from the low side of roof to the high side, overlapping the felt by 75mm until the roof is fully covered. **(Detail L3)**
- Fold the overhanging felt at ends under roof board and tack in place.

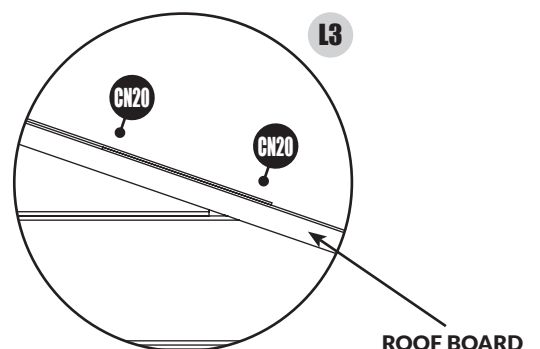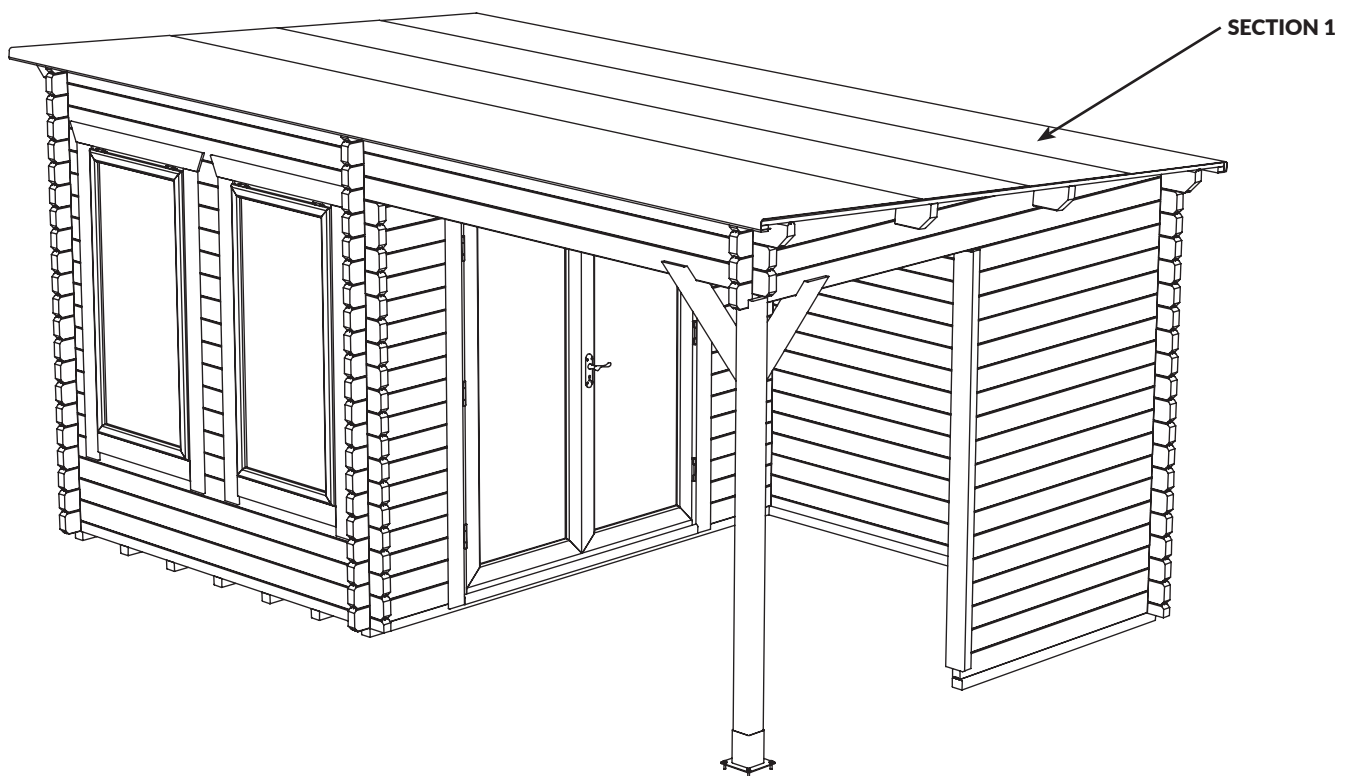

# TIGER LAKRA LOG CABIN GENERAL INSTRUCTIONS

## Step 14:

### ATTACH ROOF FASCIA BOARDS (BARGEBOARDS)

- Secure fascias together to create a double height fascia for the Lakra using 2x N40 per 175mm framing supplied. *(Detail M1 & M2)*



**NOTE: ON HIGH SIDE FASCIAS WE RECOMMEND 5x 175MM BATTENS PER DOUBLE HEIGHT FASCIAS. ON GABLE FASCIAS WE RECOMMEND 3x 175mm.**

**NOTE: PLEASE CHECK SPACING AT ENDS OF FASCIAS TO MAKE SURE BATTENS REMAIN HIDDEN**


**NOTE: ON LARGER LAKRA CABINS, THE FRONT FASCIAS MAY BE SUPPLIED IN 4 OR MORE SECTIONS.**

- Attach front roof fascia to the high side of the cabin using 6x N40 evenly spaced per fascia board, ensuring to trap the felt in between. *(Detail M3)*
- Make sure overhangs are spaced evenly.
- Attach roof fascias to gables using 3x N40 per fascia board. Secure through batten (high side), a purlin and batten (low side).

**NOTE: THERE ARE NO BARGEBOARDS SUPPLIED FOR LOW SIDE OF ROOF AS THIS WILL PREVENT EFFECTIVE WATER DRAINAGE.**

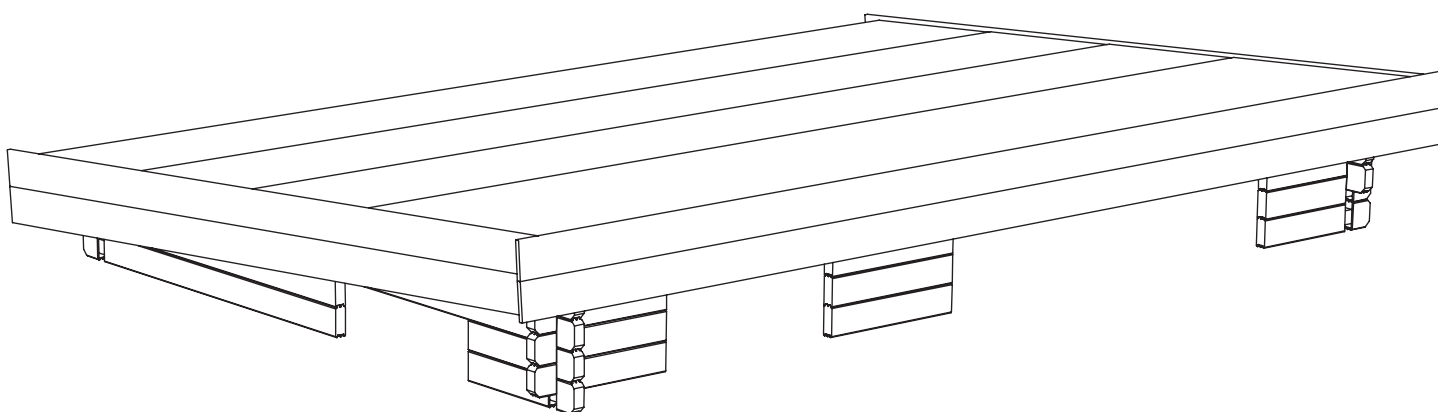


**M1**



**M2**

**N40**



**M3**

**N40**

**N40**


175  
25



## Step 15:

### LAY FLOORBOARDS


- Start to lay the floorboards. There should be a 2.5mm gap between the edge of the floorboards and the outer logs to allow for expansion and contraction.
- Nail the floorboards to the tanalised bearers below with 2x BA40 evenly spaced per floorboard per tanalised bearer.
- The last board will need cutting down to size. If installing any partitions, please return to Step 6.

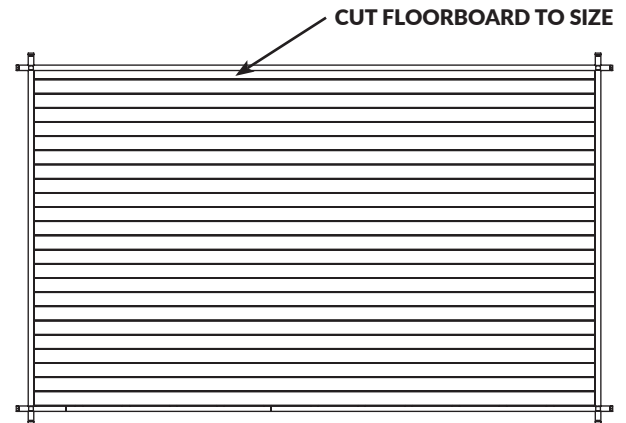

## Step 16:

### FIXING DOORS AND WINDOWS

- Check the doors are square and screw the fascia boards (from the inside) into the logs behind with 6x S40 evenly spaced as shown.
- Repeat process for all remaining doors and windows in your cabin.

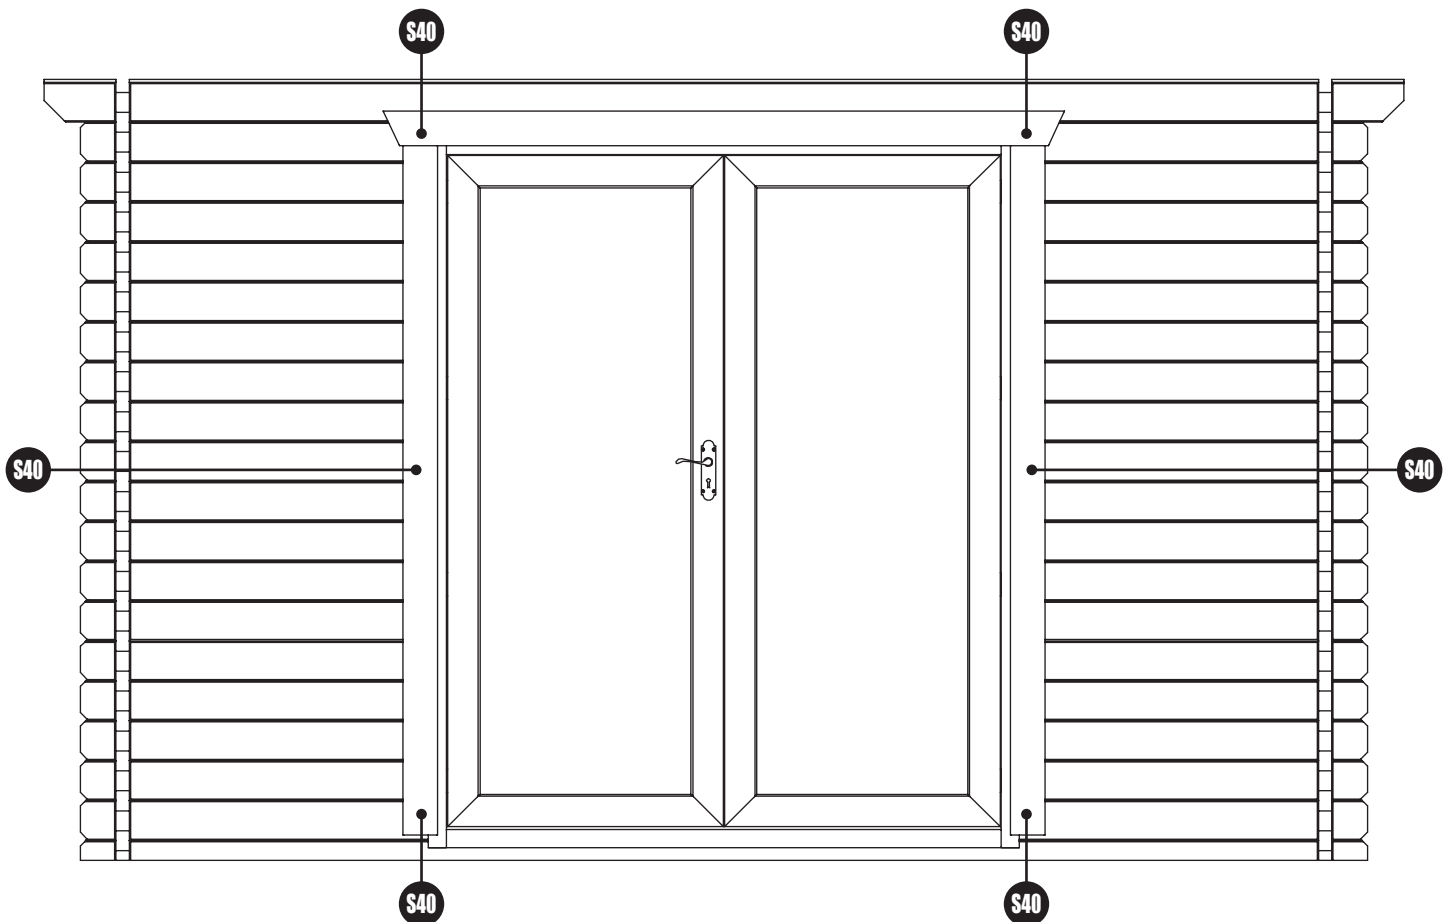


*Timber is a natural product; any log or board can expand and contract. This may cause slight gapping in the log cabin which can be rectified by un-screwing and re-screwing fascia boards over the course of the year.*

# TIGER LAKRA LOG CABIN GENERAL INSTRUCTIONS

## Step 17:

### INSTALL INTERNAL ROOF BATTENS

- Fix internal roof battens to the top side logs using 4x S40 evenly spaced along the batten as shown. **(Detail N)**
- These will seal roof and side walls.

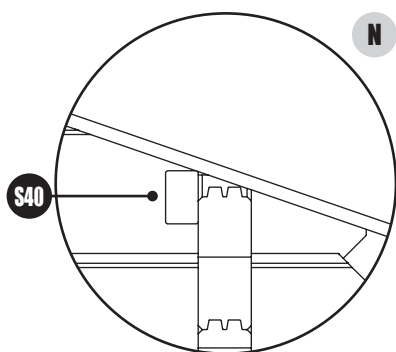


## Step 18:

### FIT INTERNAL SKIRTING

- Arrange the skirting around the outside edge of floor (internally), measure and cut down if required to best match the internal space.
- Secure each skirting section into place using 3x S40 evenly spaced along the length. **(Detail O1 & O2)**

**NOTE: DO NOT FIX THE SKIRTING TO THE FLOORBOARDS.**

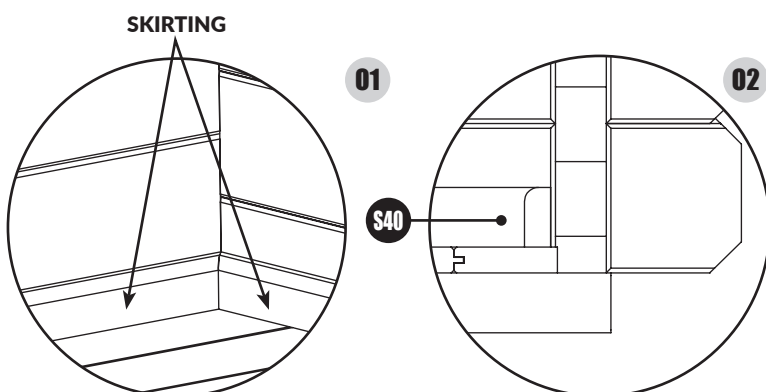




## Step 19:

### ATTACH STORM BRACES

- Fix storm braces to the inside of gables with 2x CB40 provided. Always leave the bottom CB40 slack enough to let the storm brace move as the cabin expands and contracts. *(Detail P1 & P2)*

**NOTE: ENSURE THE STORM BRACES ARE SECURED INTO THE GABLE TOP ON EACH SIDE.**

STORM BRACE

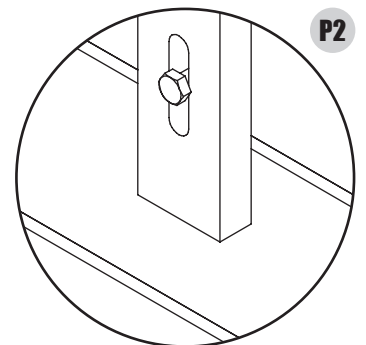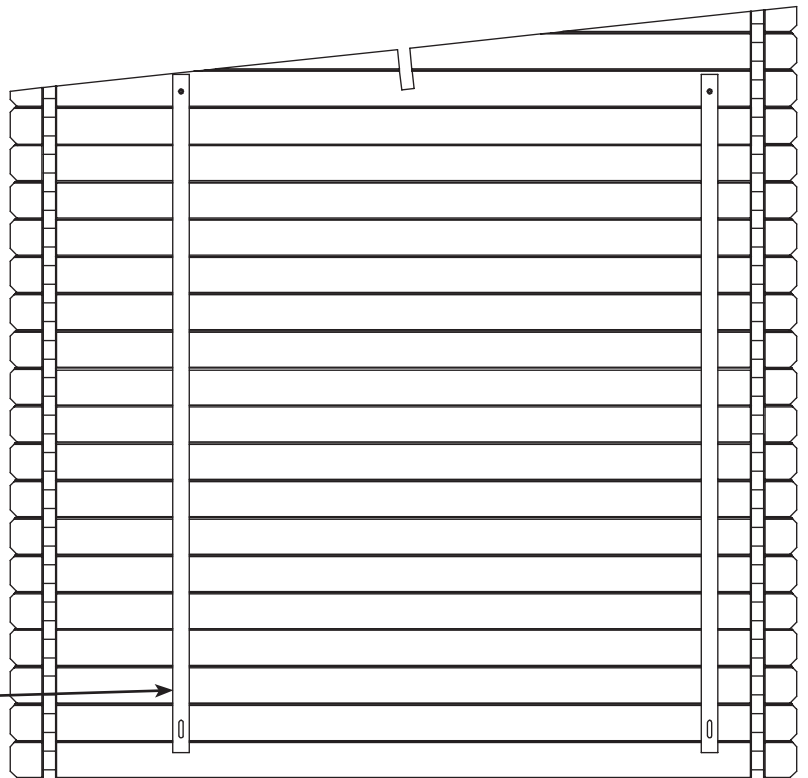


## Step 20:

### ATTACHING FASCIA SLEEVE

- Fix fascia sleeve to logs using 3x S40 evenly spaced along the board as shown.

*Timber is a natural product; any log or board can expand and contract. This may cause slight gapping in the log cabin which can be rectified by un-screwing and re-screwing fascia boards over the course of the year.*

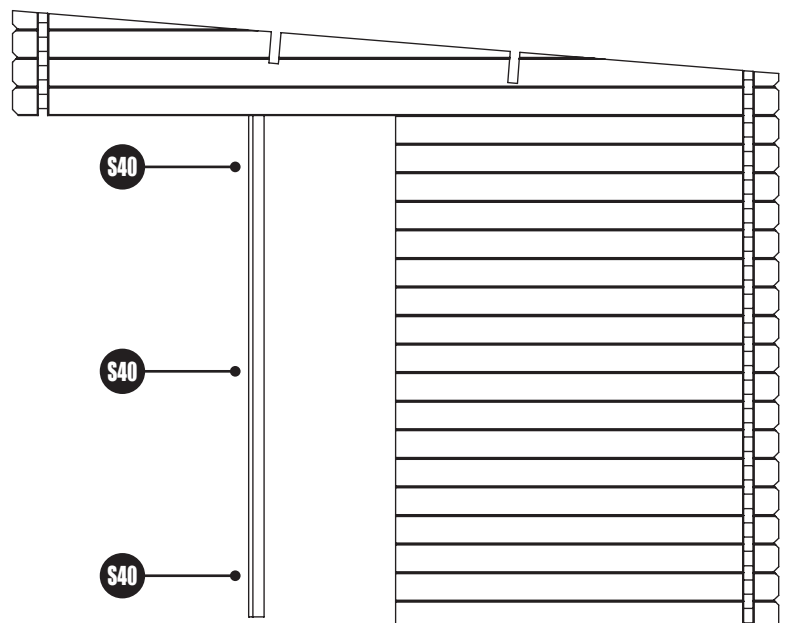



## Head Office

Calverley Lane,  
Rodley,  
Leeds,  
West Yorkshire,  
LS13 1NP

---

Telephone: 0113 205 4189

Website: [tigersheds.com](http://tigersheds.com)

Email: [customersupport@tigersheds.com](mailto:customersupport@tigersheds.com)



**SCAN CODE!**  
TO SEE GENERAL ACCESSORY &  
INSTALLATION VIDEO LIBRARY

