


TIGER LOG STORE

GENERAL ASSEMBLY INSTRUCTIONS

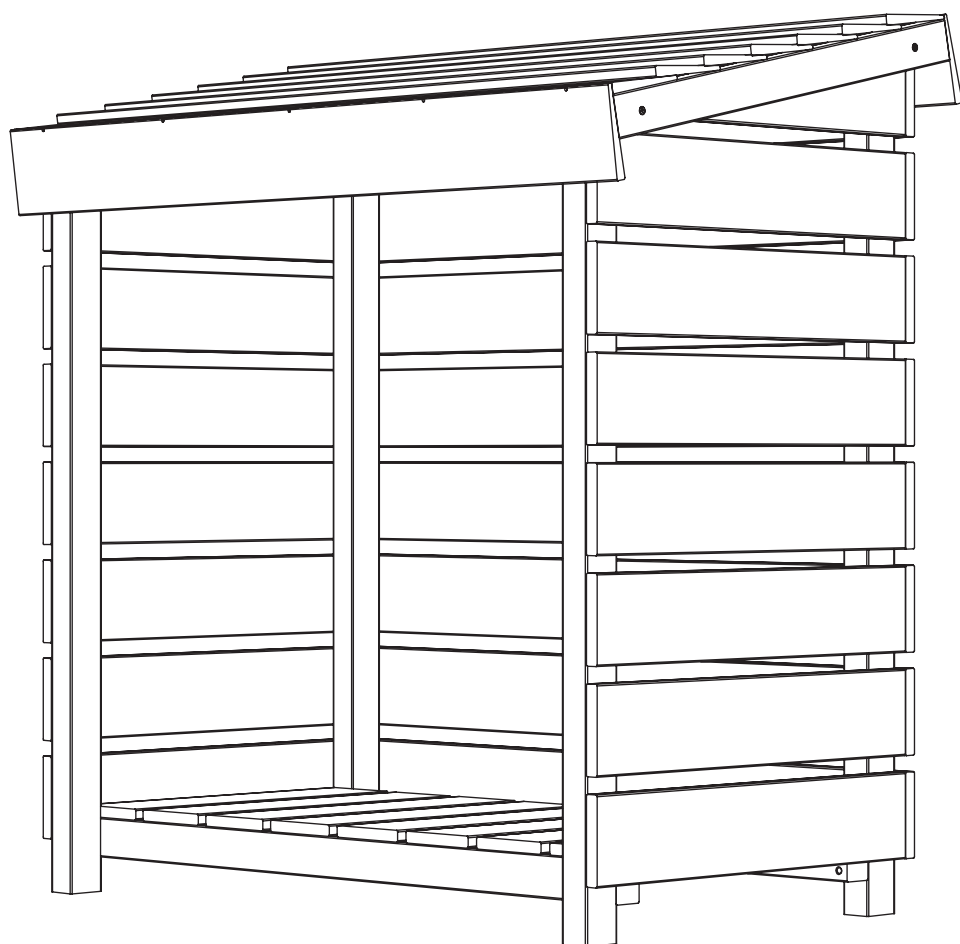

tiger[®]

BEFORE YOU GET STARTED

PLEASE READ INSTRUCTIONS CAREFULLY

- Check the pack and make sure you have all the parts listed.
- When you are ready to start, make sure you have the right tools at hand (not supplied).
- Ensure there is plenty of space and a clean dry area for assembly.

TIMBER

As with all natural materials, timber can be affected during various weather conditions. For the duration of heavy or extended periods of rain, swelling of the wooden panels may occur. Warping of the wood may also occur during excessive dry spells due to an interior moisture loss. Unfortunately, these processes cannot be avoided but can be mitigated. It is suggested that the outdoor building is sprayed with water during extended periods of warm sunshine and sheltered as much as possible during rain or snow.



SUMMER
CONTRACTION



WINTER
EXPANSION



WOOD WARPING
MAY OCCUR

To validate your guarantee and ensure longevity of the product, it is ESSENTIAL that your building is treated with a suitable wood preserver or paint AFTER assembly, both internally and externally, then annually thereafter.

BUILDING A BASE

Care must be taken to ensure the product is placed on a suitable base. When thinking about where the building and base is going to be constructed, ensure that there will be access to all sides for maintenance work and annual treatment.

Ensure the base is firm and level and is built on firm ground, to prevent distortion.

The constructed base must be at least the size of the product as referenced in supplied construct diagram. It is also recommended that the floor be at least 25mm above the surrounding ground level to avoid flooding.

RECOMMENDED TYPES OF BASE

- Durable plastic grid.*
- Concrete 75mm laid on top of 75mm hard-core.
- Slabs laid on 50mm of sharp sand.
- Timber base - Self constructed/Buy pre-made.



PLASTIC BASE



CONCRETE BASE



SLAB BASE



TIMBER BASE



BROKEN SLABS



BARE SOIL



LOOSE GRAVEL

**We recommend a Fastfit EcoBase for your building. It is durable, lightweight, flexible, and easy to put in place. Please see [tigersheds.com](https://www.tigersheds.com) for details.*

CAUTION:

All buildings should be erected by two competent adults.



CAUTION:

It is advisable to wear safety gloves during building installation.



Whilst all products manufactured are made to the highest standards of safety, we cannot accept responsibility for your safety whilst erecting or using this product.



The mark of
responsible forestry
FSC® C125286



MADE IN THE UK SINCE 1913.

We have been making our high quality, great value garden buildings here in Britain for decades.

BEFORE YOU GET STARTED

TOOLS REQUIRED

We recommend using the following tools (not supplied):



HAMMER



DRILL



SCREWDRIVER +



SHARP KNIFE



SPIRIT LEVEL

FIXING KIT CONTENTS:



Screws (50mm Galvanised - QTY 32)



Nails (40mm Galvanised - QTY 10)



Screws (80mm Galvanised - QTY 8)

ASSEMBLY


- Assembly is straight forward if you follow these step-by-step instructions.

IMPORTANT

- Before assembly, please make sure you have a suitable base ready to erect your building on.
- Your base **MUST** be firm and level to ensure that the building is assembled properly and is square.
- **DO NOT** start your build until you have checked that all the parts of your building are present and in a suitable condition.
- Panels may have become twisted during loading/unloading and/or transportation. Please check that all framing and cladding are square before beginning assembly.
- Pre-drill all screw holes to reduce the chances of the timber splitting.
- If you are organising a third party to install your building, it is best practice not to schedule this immediately on receipt of your order, to give you time to check your delivery.

BUILDING PACK CONTENTS:

For full details of what should be included please see the packing list supplied with the delivery. They are also available on request in pdf form from our helpful Customer Support team – please call **0113 205 4189** for Customer Support or use the 'Items Delivered Query' form at [tigersheds.com/contact](https://www.tigersheds.com/contact).

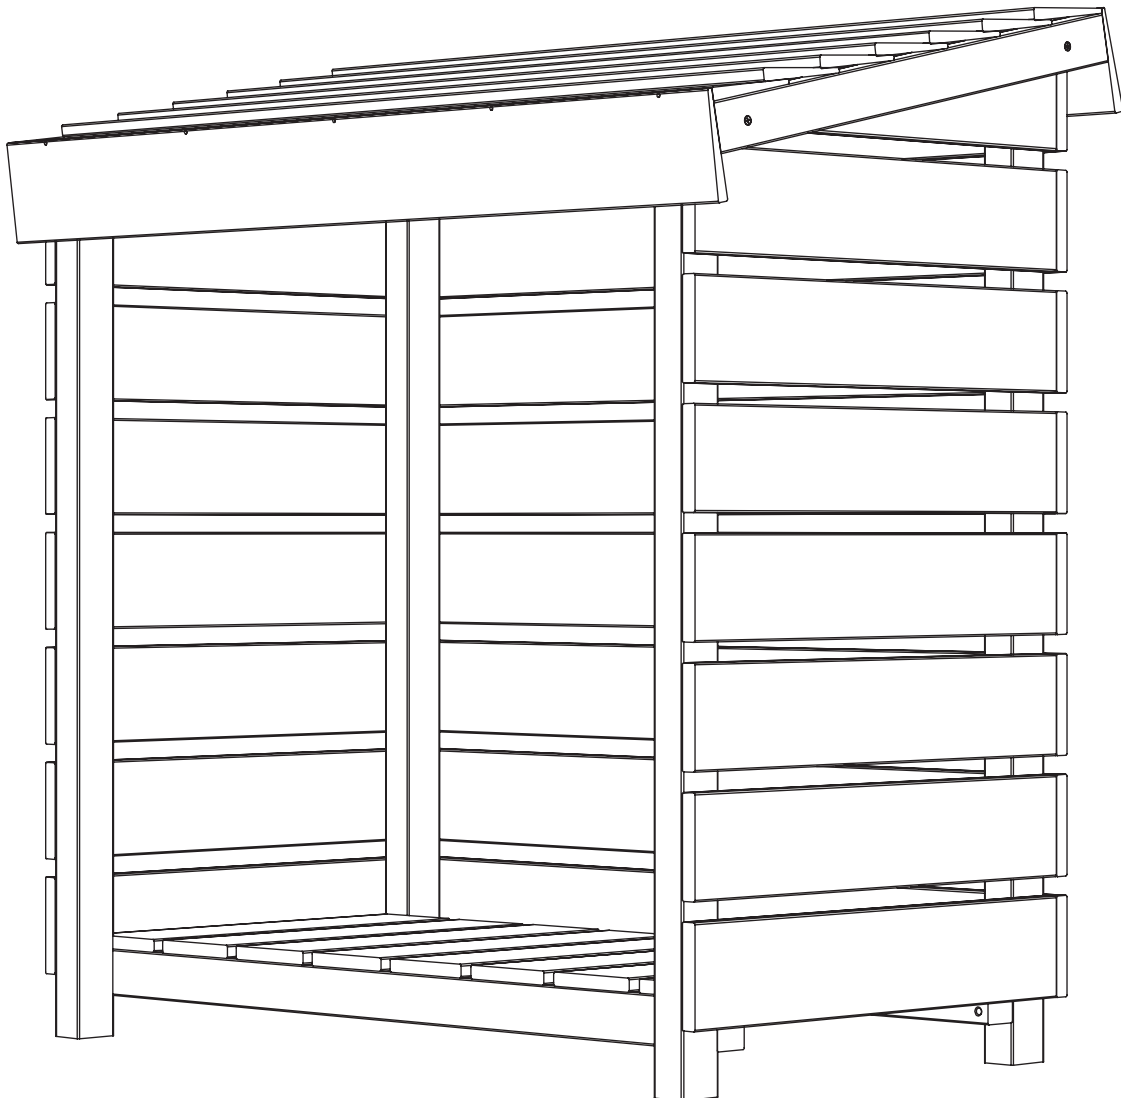

Unpacking The Log Store.


- Carefully remove all packaging and remove the log store components.
NOTE: PARTS MAY HAVE BECOME LOOSE OR MOVED DURING TRANSPORTATION.
- Lay components on a dry, horizontal surface.

TIGER LOG STORE GENERAL INSTRUCTIONS

Step 1:

SHELF & GABLE ASSEMBLY:


- Lay down shelf on its side and line up two gable panels. *(Detail A)*
- Secure using 1x S80 through the shelf and into the gable panels. *(Detail B)*
- Repeat for all 4 corners. Turn right side up to attach roof. *(Detail C)*

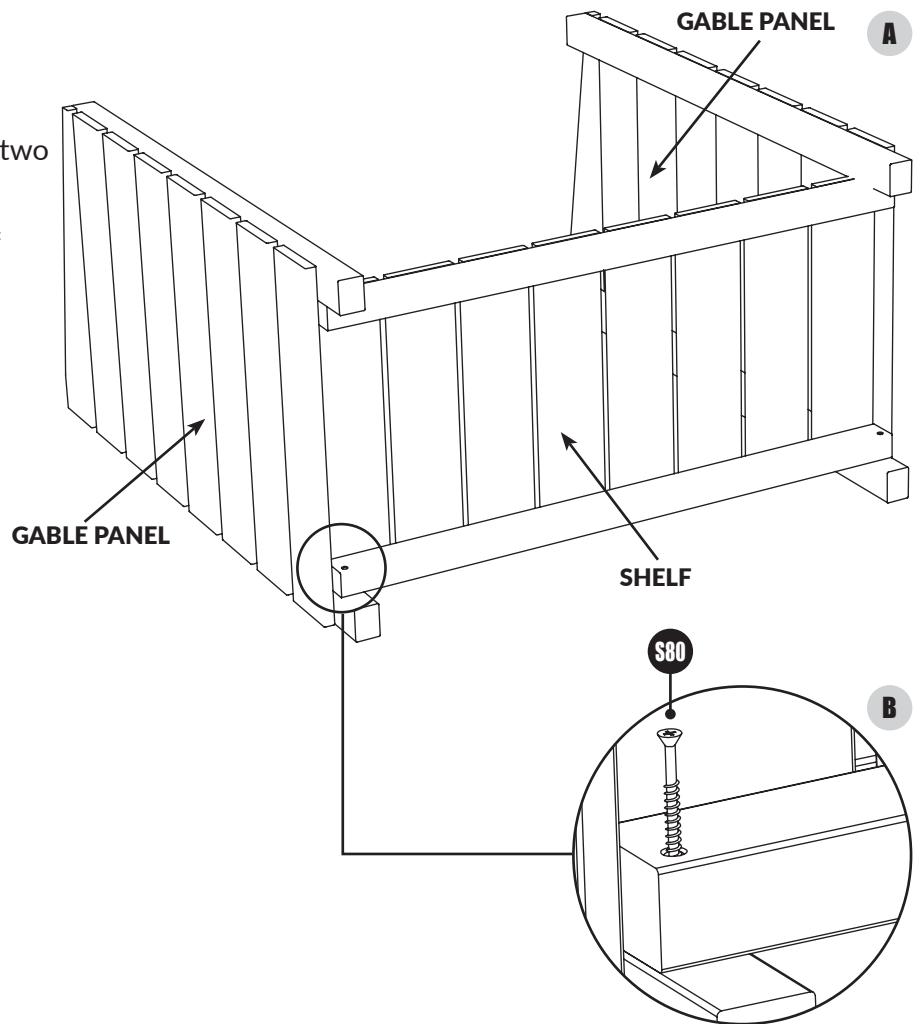

Step 2:

FIX ROOF IN PLACE:

- Place roof panel on top of gables as shown. *(Detail D)*
- Ensure even overhang front and back.
- Secure using 1x S80 through the roof and into the gable panels. *(Detail D)*
- Repeat for all 4 corners.


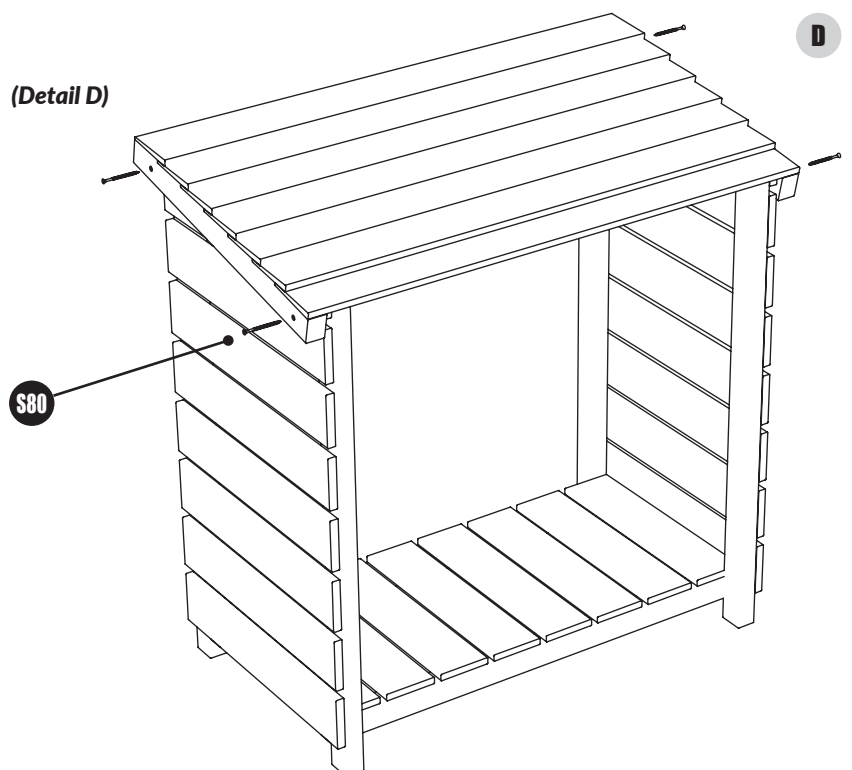


Step 3:

ATTACH BACK BOARDS:

- Use 4x S50 to attach the back boards to the gable panels.
- Line up back boards with the boards on the gable panels. *(Detail E)*



NOTE: CHECK LOG STORE IS SQUARE AS YOU BUILD.

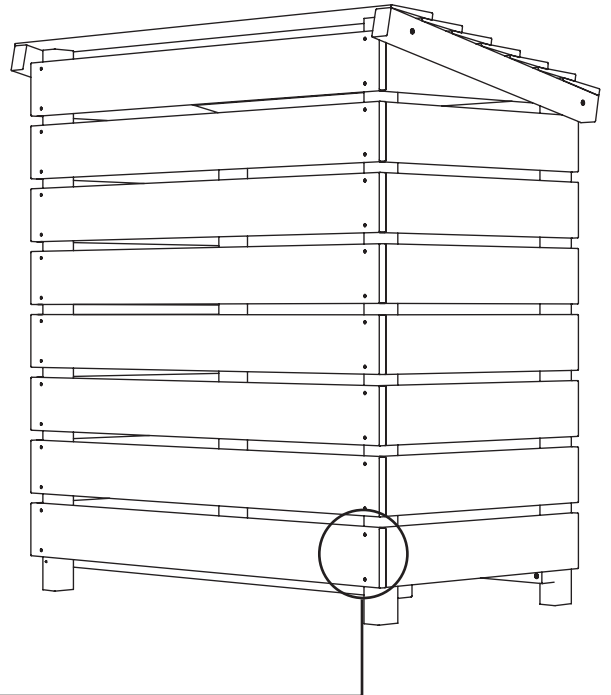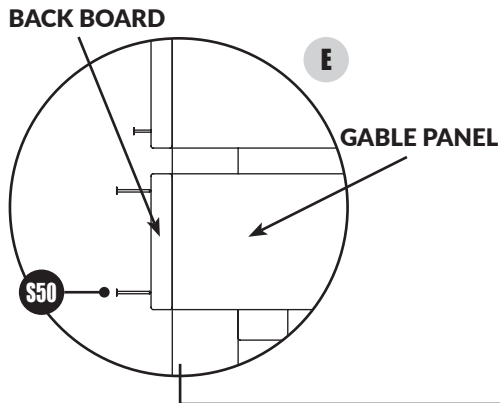

Step 4:

ATTACH FASCIA BOARDS:

- Complete the look by attaching fascia boards front and rear.
- Secure flush using 5x N40 per fascia board. *(Detail F)*

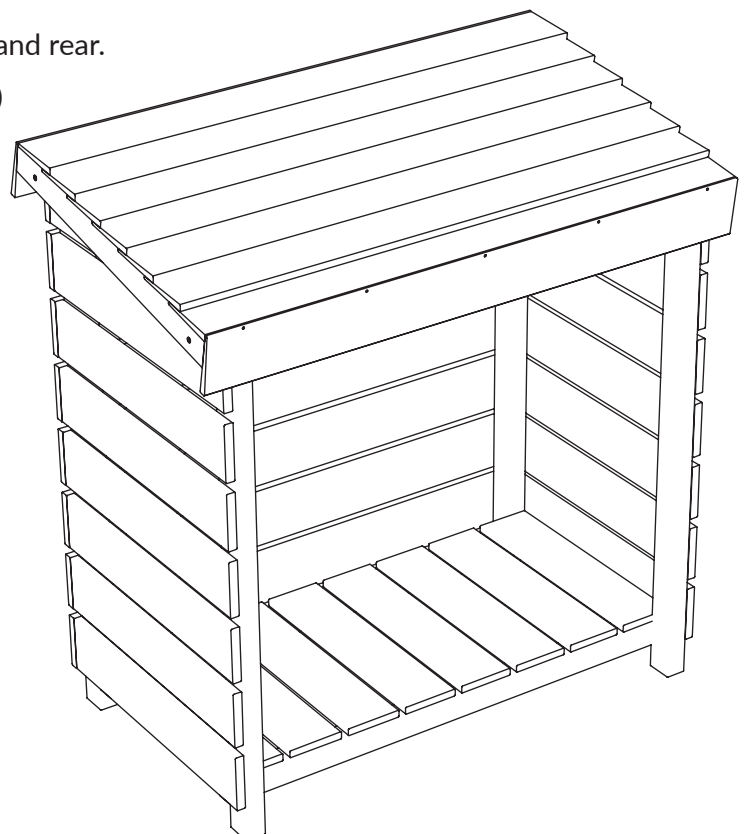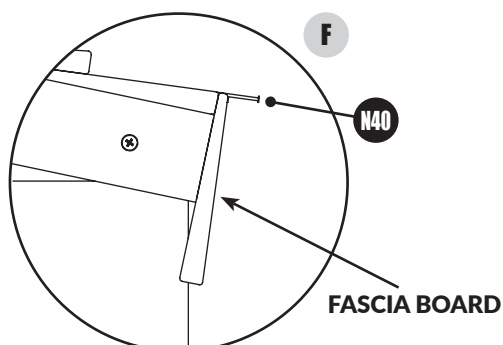



Head Office

Calverley Lane,
Rodley,
Leeds,
West Yorkshire,
LS13 1NP

Telephone: 0113 205 4189
Website: tigersheds.com
Email: customersupport@tigersheds.com



SCAN CODE!
TO SEE GENERAL ACCESSORY &
INSTALLATION VIDEO LIBRARY

